




CONCRETE UNDERPASS AND TUNNEL DESIGN

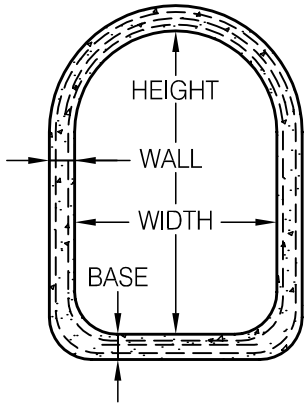

DESIGN A

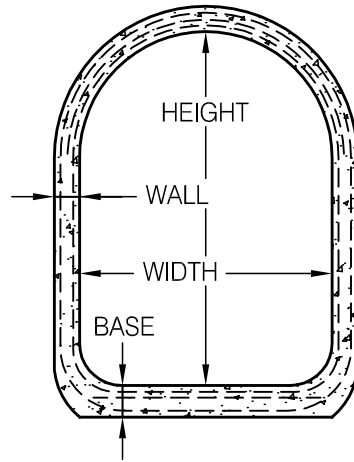

DESIGN B

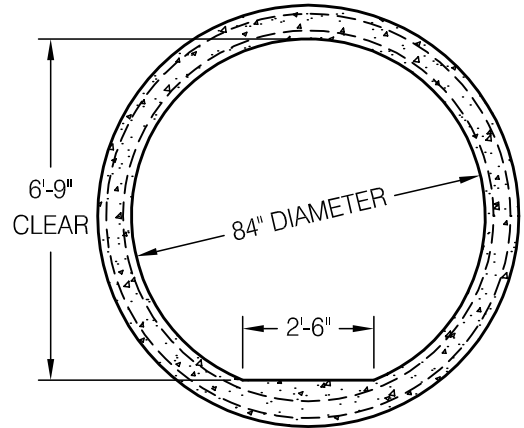

DESIGN C

STRUCTURE	DESIGN	INSIDE WIDTH	INSIDE HEIGHT	LAYING LENGTH	WT./FT. LBS.	WALL INCHES	BASE INCHES
4' x 5' SECTION	A	4'-0"	5'-0"	6'-0"	1140	5	5
4' x 6' SECTION	A	4'-0"	6'-0"	6'-0"	1270	5	5
4' x 6' SECTION	A	4'-0"	6'-0"	6'-0"	1520	6	6
5' x 7' SECTION	B	5'-0"	7'-0"	6'-0"	1970	6	7 1/2
91" x 91" SECTION	B	7'-7"	7'-7"	6'-0"	3300	8 1/2	10
84" SECTION	C	7'-0"	6'-9"	6'-0"	2530	8	11

Underpass and tunnel sections are manufactured with a tongue and groove joint to strengths specified in applicable portions of ASTM Specification C76. Flexible compounds may be used for joint sealant.

Copyright © 1999 The Cretex Companies, Inc.
All rights reserved. Information on this document is subject to change without notice.



IOWA CONCRETE PRODUCTS CO.

WEST DES MOINES, IOWA

CONCRETE UNDERPASS AND TUNNEL
DESIGN

SCALE NOT TO SCALE DATE JAN. 1, 1999 DWG. NO. ICPUNDESIGN